


# Rembrand T3 **A<sup>+</sup>**

Room heater, Wood Pellet Stove

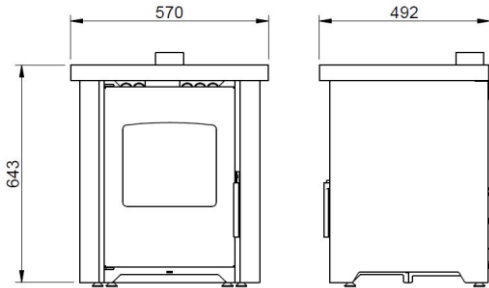

Distance to combustible materials:

Front: 100 cm      Sides: 5 cm      Back: 5 cm

Performance	Nominal	Minimum
Output	6,1 kW	3,0 kW
Efficiency	89,4%	89,1%
Flue gas temp.	174 °C	122 °C
Pellet consumption	1,33 kg	0,63 kg
Elec. consumption	0,017 kW	0,012 kW
CO at 13% O <sub>2</sub>	195 mg/m <sub>0</sub> <sup>3</sup>	265 mg/m <sub>0</sub> <sup>3</sup>
NO <sub>x</sub> at 13% O <sub>2</sub>	125 mg/m <sub>0</sub> <sup>3</sup>	110 mg/m <sub>0</sub> <sup>3</sup>
C <sub>x</sub> H <sub>y</sub> at 13% O <sub>2</sub>	7 mg/m <sub>0</sub> <sup>3</sup>	3 mg/m <sub>0</sub> <sup>3</sup>
Dust at 13% O <sub>2</sub>	15 mg/m <sub>0</sub> <sup>3</sup>	17 mg/m <sub>0</sub> <sup>3</sup>

Weight	62.9kg
Max. electricity consumption	320 W
Mains voltage	230 V - 50 Hz
Flue gas outlet	∅ 80 mm
Air intake	∅ 40 mm
Fuel; maximum dimension and moisture content of pellets	Wood, ∅ 7 mm, Length: 30 mm, Moisture < 12 %

Use only recommended fuel.

Five manual stages, no temperature control

Read the manual before use.



Declaration of Performance: Nr. 2010

NEN-EN 14785:2006

Notified Body: SGS Nederland BV (N.B. 0608)

Report: EZKA/2022-02/00009-1

**Made in the Netherlands**

Industrieweg 37, 9781 AC Bedum